


MHB with Fixed Corner Sections

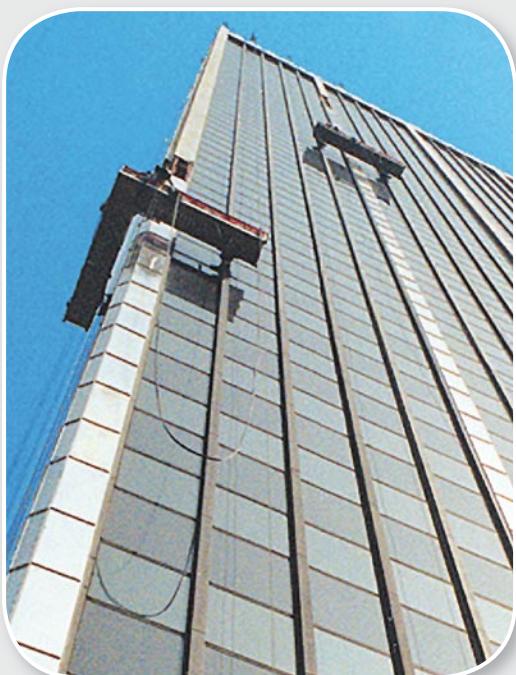

Corner sections can be used to follow the contours of the structure precisely and allow access within 30 to 60 cm. of the working surface. You can choose from a variety of fixed and adjustable corner sections.


Please be sure to consult with your Altrex supplier for factory approval for each configuration. Please consult your Altrex dealer with your specific application requirements.

Fixed Corner Sections

- Light weight aluminium construction
- Mounts to the U-frame with Quickpins
- Supplied with Guardrails
- Economical solution
- Available in 4 separate angles: 30°, 45°, 60° and 90°

Load capacity and configuration tables

Regardless of the used type or angle of corner section, the load capacity of any L-shaped platform configuration with three hoists is limited to 250kg in total.
(two men with light equipment)

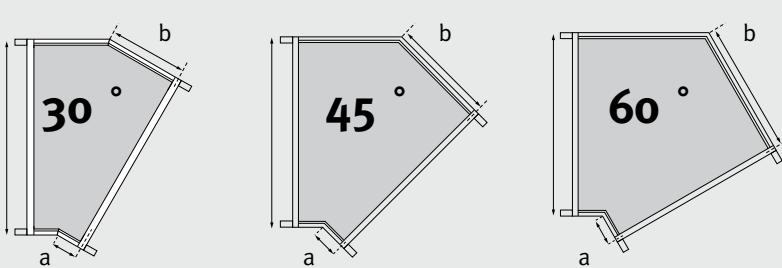

Dimension table

Corner section	a inch	a mm	b inch	b mm
30°	4,6	116 mm	11,9	303 mm
45°	4,5	114 mm	16,1	410 mm
60°	4,1	105 mm	20,5	520 mm
90°	15,8	401 mm	43,7	1111 mm

Dimensions are from corner to center of U-frames

Configuration table


Nr.	Description	30°	45°	60°	90°
1	outside sideframe	1	1	1	*
2	outside guardrail	1	1	1	1
3	toeboard	1	1	1	*
4	inside mid-rail	1	1	1	*
5	inside guardrail	1	1	1	1
6	alum. deck	1	1	1	*
7	guardrail post			1	1

* = one fixed part

- Configuration tables

Example: 3m - corner 60° - 2m - 3m - 3m
with C.L.1 = 1m and C.L.2 = 1m

LENGTH 1 (m)	C.L.1 (m)	DIST.2 (m)	LENGTH 2 (m)								
			5	6	7	8	9	10	11	12	
1	0	1									
2	0	1	5	6	7	8	9	10	11	12	
3	0; 1	1	5	6	7	8	9	10	11	12	
4	0; 1	1	5	6	7	8	9	10	11	12	
5	0; 1; 2	1	5	6	7	8	9	10	11	12	
6	0; 1; 2	1	5	6	7	8	9	10	11	12	
C.L.3 (m)			0; 1	0; 1; 2	0; 1; 2	0; 1; 2	0; 1; 2; 3	0; 1; 2; 3	0; 1; 2; 3	0; 1; 2; 3	

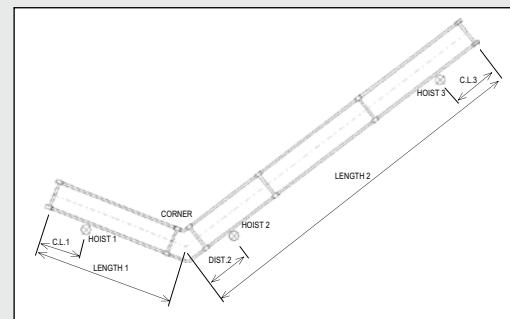

MHB with Fixed Corner Sections

